

# METEOR - II 420

Automatic Ø 16" Upcut Saw



## FEATURES

Used for cutting processes of aluminum, PVC and wooden profiles.

- Hydro-Pneumatic cutting process
- Secure cutting by the cover equipped with a safety sensor
- Cutting speed adjustment based on the profile
- Cutting at any desired angle between -90° and +45°
- Cutting at -90°, -67.5°, -45°, -30°, -22.5°, -15°, 0°, 15°, 22.5°, 30°, 45° right and left fixed angles
- Table saw function at -90° angle.
- Increase in cutting capacity with mobile miter
- Pneumatic vertical and horizontal clamp

### Standard Equipment

- Ø 16" (420mm) saw blade
- Cooling system

### Optional Equipment

- Conveyor
- Single-phase system
- Vacuum cleaner for chips

HP kw	n	3~ Hz	I (220V)	Ø D	Ø d	s	n	Air Pressure	Air Consumption	l x w x h (inch)
4 3	3000 rpm	60	15 A	16"	1 <sup>3</sup> / <sub>16</sub> " 1 <sup>1</sup> / <sub>4</sub> "	3/ <sub>16</sub> "	3580 rpm	6-8 bar	10 Gal/min	148" x 43" x 52" 555 lbs



The product data, descriptions and illustrations are shown for advertising purpose in this document and Oz Machine, reserves the right to make modifications or improvements on data, descriptions and illustrations on this document without prior notice.

# METEOR - II 420

Automatic Ø 16" Upcut Saw



## Cutting Diagrams

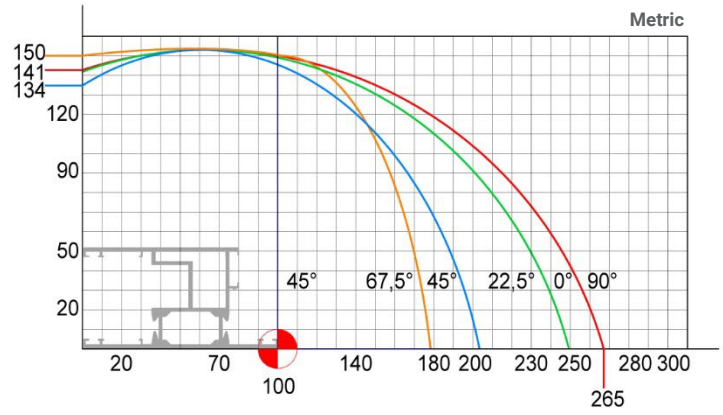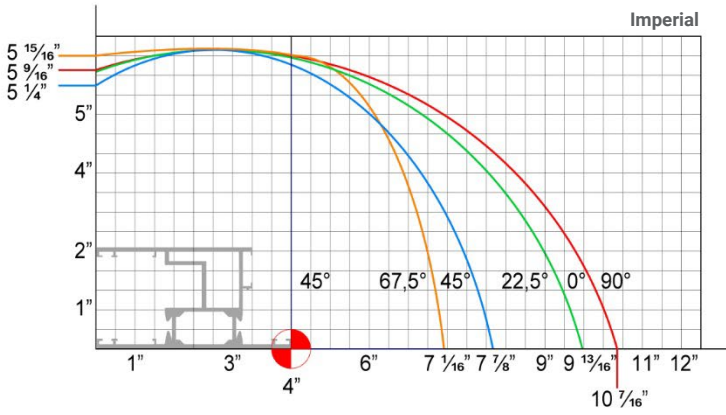

The product data, descriptions and illustrations are shown for advertising purpose in this document and Oz Machine, reserves the right to make modifications or improvements on data, descriptions and illustrations on this document without prior notice.