







FEATURES

Used for V cuts, double side 45 degree cutting and 90 degrees notching on various profiles. Thanks to its double Ø20" saw blades that speeds up the production.



- Wide capacity with Ø20" saw blades
- Hydro-Pneumatic cutting process motion
- Adjustable saw blade stroke speed
- Two button start for safety

Standard Equipment

- Ø 20" Saw Blade (2pcs)
- Cooling system
- V Cutting Stops and Pneumatic Clamps
- Notching Stops and Pneumatic Clamps
- Set of Conveyor for Notching
- Set of Conveyor for V Cuts


												
HP	kW	n	3~ Hz	I (220 V)	ø D	ø d	s	n	Air Pressure	Air Consumption	l x w x h (inch)	lbs
4	3	2900 r.p.m	50	12 A	19 ¹¹ / ₁₆ "	1 ³ / ₁₆ " 1 ⁵ / ₁₆ "	3/16"	2340 r.p.m	87-116 psi	14 gal / min.	46 x 45 x 78	1190

The product data, descriptions and illustrations are shown for advertising purpose in this document and Oz Machine, reserves the right to make modifications or improvements on data, descriptions and illustrations on this document without prior notice.

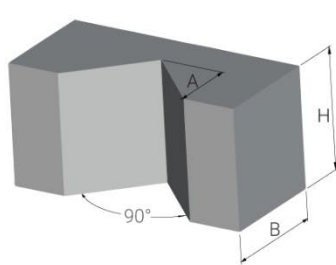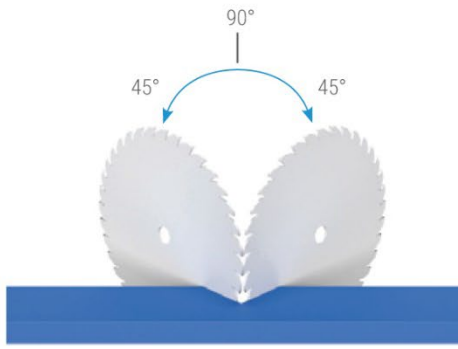


A: 5 1/2" **B:** 9 1/16" **H:** 9 13/16"

V CUTTING

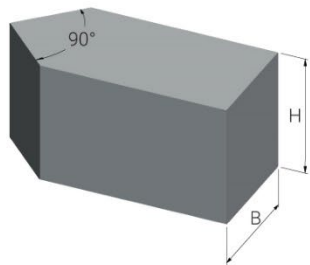


B: 9 1/16" **H:** 9 13/16"

90° ARROW CUTTING



B: 9 1/16" **C:** 7 1/16" **H:** 9 13/16"

90° NOTCHING

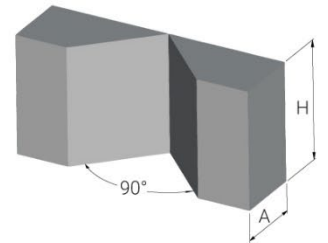

A: 5 1/2" **H:** 9 13/16"

45° CUTTING

The product data, descriptions and illustrations are shown for advertising purpose in this document and Oz Machine, reserves the right to make modifications or improvements on data, descriptions and illustrations on this document without prior notice.