SERIES COMPARISON


OZ MACHINE USA

PRO SERIES

Fully Automatic Horizontal Stretch Wrapping Lines

7" touch panel with unlimited recipes, constant film tension system, automatic top pressure, film clamping and cutting. 480V 3P option.

RING DIAMETER (CLEAR OPENING), TO SCALE

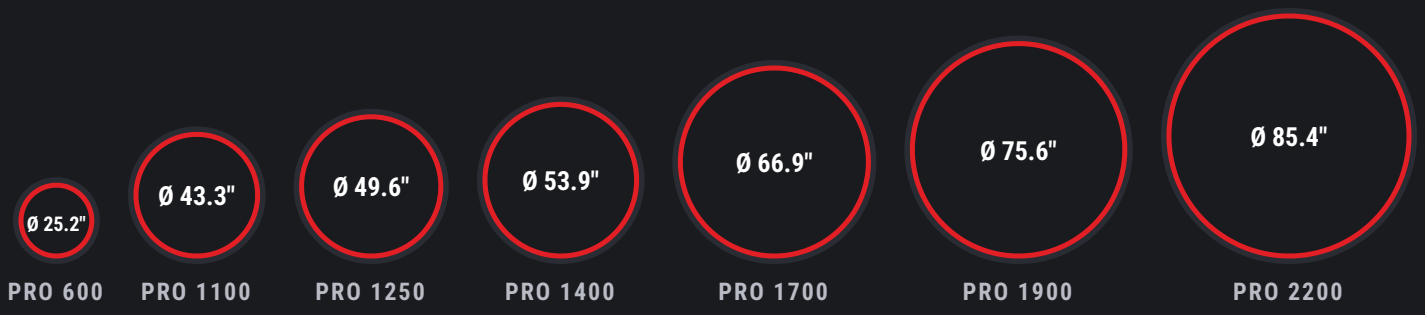

KEY VALUES

	 PRO 600	 PRO 1100	 PRO 1250	 PRO 1400	 PRO 1700	 PRO 1900	 PRO 2200
Ring diameter	25.2" (640 mm)	43.3" (1100 mm)	49.6" (1260 mm)	53.9" (1370 mm)	66.9" (1700 mm)	75.6" (1920 mm)	85.4" (2170 mm)
Ring speed (rpm)	5–90	90	75	5–90	5–60	50	55
Max. product passage (W x H)	Panel width 19.7" · square 17.0"	38.6 x 5.9" / 27.6 x 21.7"	46.1 x 0.8" / 27.6 x 27.6"	Panel 50.0 x 11.8" · cabinet 35.4 x 29.9"	Panel 62.2 x 11.8" · cabinet 49.2 x 37.4"	47.2 x 43.3"	59.1 x 47.2"
Min. product length	23.6"	11.8"	19.7"	23.6"	29.5"	23.6"	29.5"
Film width	6.7" / 9.84"	5" / 6.7" / 9.85"	9.85"	9.84"	9.84"	9.85" (5" / 6.7")	9.85" / 19.7"
Power	1.5–2.25 kW	2.25 kW	2.25 kW	2.25 kW	3 kW	3 kW	3 kW
Voltage, 60 Hz	220V 3P	220V 3P	220V 3P	220V 3P	220V 3P	220V 3P	220V 3P
Air	100 psi	100 psi	100 psi	100 psi	100 psi	100 psi	100 psi
Dimensions (W x L x H)	63.0 x 90.6 x 63.0"	76.8 x 157.5 x 82.7"	88.6 x 157.5 x 88.6"	88.6 x 157.5 x 102.4"	102.4 x 157.5 x 108.3"	105.5 x 62.0 x 98.0" *	126.0 x 82.7 x 112.2" *
Weight	1,323 lb	1,808 lb	2,425 lb	2,094 lb	3,527 lb	4,189 lb	6,173 lb

* Dimensions exclude conveyors (conveyors built per application). Full data, options and layouts: see each model's technical sheet.