OZ MACHINE USA

PRO 600

Fully Automatic Horizontal Stretch Wrapping Line



A compact automatic wrapping line for profiles, moldings and narrow panels. Recipes are stored on the 7" touch panel, the constant tension system keeps the film even, and clamping, cutting and top pressure are automatic.

25.2"	5–90 rpm	19.7"	7"
Ring diameter	Ring speed	Max. panel width	Touch panel, recipes

KEY FEATURES

- 7" touch panel with unlimited recipes
- Photocell product detection
- Three conveyor length options
- Constant film tension system
- Automatic top pressure, clamping and cutting
- Short-part bridge as standard

Power	Voltage	Air	Dimensions (W x L x H)	Weight
1.5–2.25 kW / 2–3 HP	220V 3P, 60 Hz	100 psi	63.0 x 90.6 x 63.0"	1,323 lb

TECHNICAL DATA

PRO 600

Fully Automatic Horizontal Stretch Wrapping Line

OZ MACHINE USA

WRAPPING

Ring diameter (clear opening)	25.2" (640 mm)
Ring speed	5–90 rpm
Max. panel width	19.7" (500 mm)
Max. molding height	13.0" (330 mm)
Max. square section	17.0" (431 mm)
Min. product length (with bridge)	23.6" (600 mm)
Min. package size	3.9" x 0.7" x 15.7" (100 x 18 x 400 mm)

STRETCH FILM

Film width	6.7" / 9.84" (170 / 250 mm)
Film roll outer diameter	8.66" (220 mm)
Roll core	3" (76 mm); 1.5" (38 mm) option
Film thickness	15–30 µm

CONVEYOR

Standard (W x L)	11.8" x 35.4" (300 x 900 mm)
Options	11.8" x 51.2" / 15.7" x 59.1"
Load	34 lb/ft (50 kg/m)
Working height	33.5"–35.4" (850–900 mm), adjustable

STANDARD EQUIPMENT

7" touch panel, unlimited recipes	●
Film tensioner with constant tension system	●
Photocell product detection	●
Automatic top pressure rollers	●
Automatic film clamping and cutting	●
Motorized belt conveyors, speed and reverse	●
Adjustable short-part bridge	●
Package counter, remote access	●

OPTIONAL EQUIPMENT

Integrated labeling system	○
Label scanner and reprint system	○
Film break detection and auto-stop	○
AI vision operator (sets the wrap program)	○
Double film carriage (2x speed)	○
Motorized short-part bridge	○
W unit (bubble / foam wrap)	○

AIR & ELECTRICAL

Power	1.5–2.25 kW (2–3 HP)
Voltage	220V 3P, 60 Hz (480V 3P option)
Air	100 psi, ~0.7 CFM

DIMENSIONS & WEIGHT

W x L x H	63.0 x 90.6 x 63.0" (1600 x 2300 x 1600 mm)
Weight	1,323 lb (600 kg)

● Standard ○ Optional

PRO 600

Fully Automatic Horizontal Stretch Wrapping Line

OZ MACHINE USA

FRONT AND SIDE VIEW

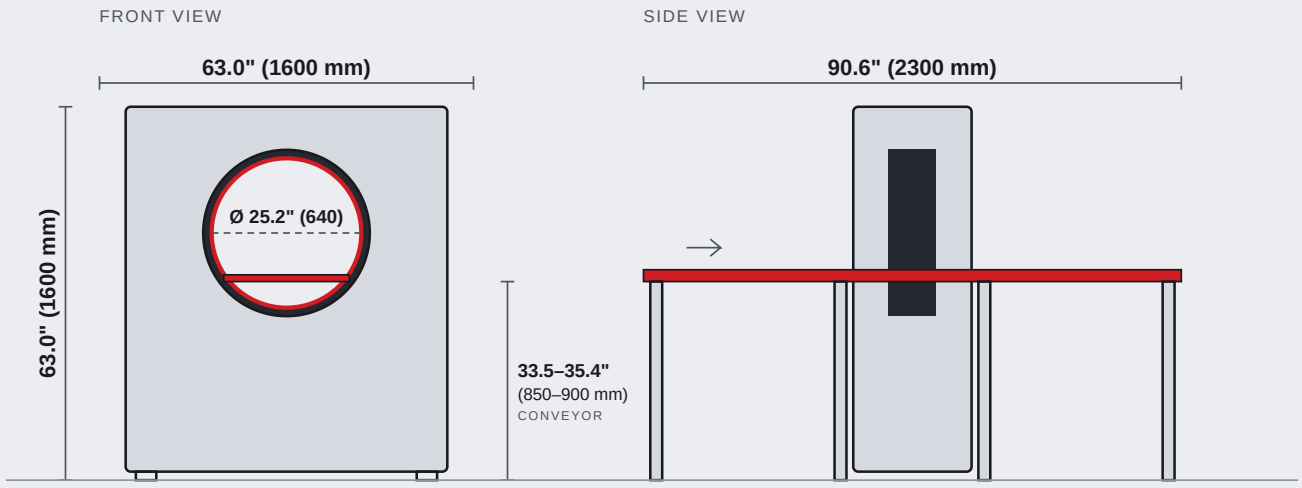

Simplified layout. Dimensions in inches (millimeters).

PRODUCT PASSAGE

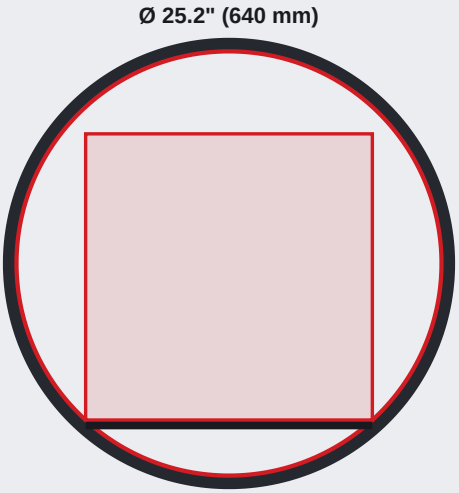

MAX. PRODUCT SECTION (W x H)

MAX. SQUARE
17.0" x 17.0" (431 x 431 mm)

Max. product section through the ring, drawn to scale. Inches (millimeters).

OZ MACHINE USA
2690 West 3rd Court, Hialeah, FL 33010
+1 833-390-0060 (toll-free) · sales@ozmachineusa.com

USA · CANADA · MEXICO

Product data, descriptions and illustrations may change without prior notice.