OZ MACHINE USA

GO 900

Semi-Automatic Orbital Stretch Wrapper



A pedal-controlled ring wrapper for doors, frames, panels and long profiles. Products move over the roller conveyor through the ring while the double film carriage wraps them; a typical product is wrapped in about 30 seconds, without compressed air.

37.0"	5–90 rpm	33.5 x 24.8"	~30 s
Ring diameter	Ring speed	Max. product passage	Cycle per product

KEY FEATURES

+ Foot pedal control, simple to run
+ Adjustable ring speed
+ Unlimited product length
+ Double film carriage as standard
+ No compressed air needed
+ Compact footprint

Power	Voltage	Air	Dimensions (W x L x H)	Weight
0.75 kW / 1 HP	220V 1P, 60 Hz	Not required	58.3 x 88.6 x 66.1"	837 lb

TECHNICAL DATA

GO 900

Semi-Automatic Orbital Stretch Wrapper

OZ MACHINE USA

WRAPPING

Ring diameter (clear opening)	37.0" (940 mm)
Ring speed	5–90 rpm
Max. product passage	33.5" W x 24.8" H (850 x 630 mm)
Min. product length	13" (330 mm)
Max. product length	Unlimited
Cycle time	~30 s per product (depends on product)

STRETCH FILM

Film width	5" / 6.6" (125 / 167 mm)
Film roll outer diameter	8.66" (220 mm)
Roll core	3" (76 mm); 1.5" (38 mm) option
Film thickness	15–30 µm

CONVEYOR

Type	Roller
Load	67 lb/ft (100 kg/m)

STANDARD EQUIPMENT

Semi-automatic, foot pedal control	●
Double film carriage	●
Roller conveyor	●
No compressed air needed	●

OPTIONAL EQUIPMENT

Additional roller conveyor	○
Automatic film cutting	○

ELECTRICAL

Power	0.75 kW (1 HP)
Voltage	220V 1P, 60 Hz (110–120V 1P option)
Air	Not required

DIMENSIONS & WEIGHT

W x L x H	58.3 x 88.6 x 66.1" (1480 x 2250 x 1680 mm)
Weight	837 lb (380 kg)

● Standard ○ Optional

GO 900

Semi-Automatic Orbital Stretch Wrapper

FRONT AND SIDE VIEW

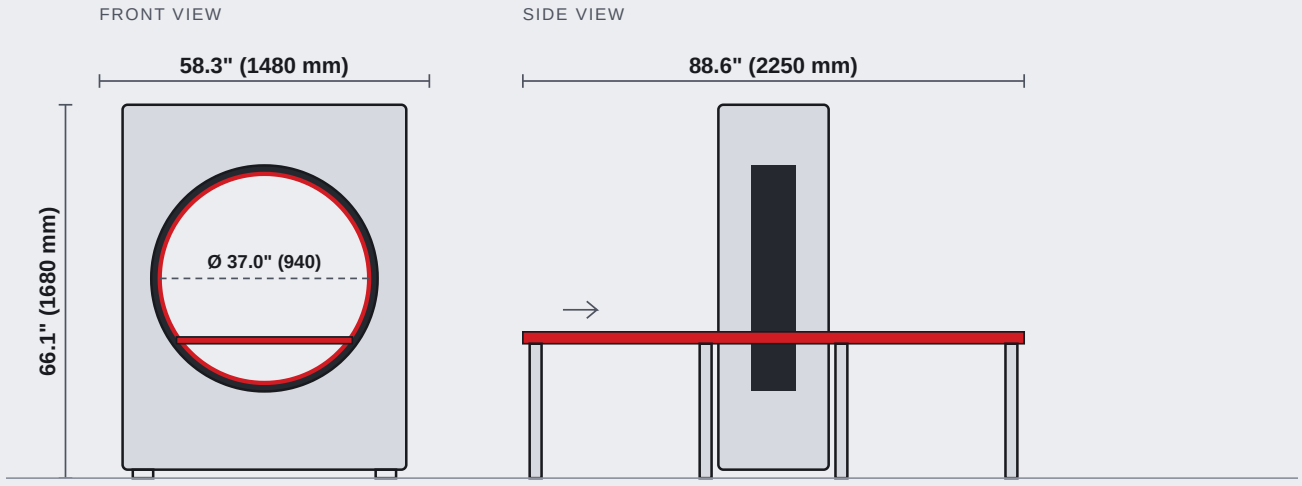

Simplified layout. Dimensions in inches (millimeters).

PRODUCT PASSAGE

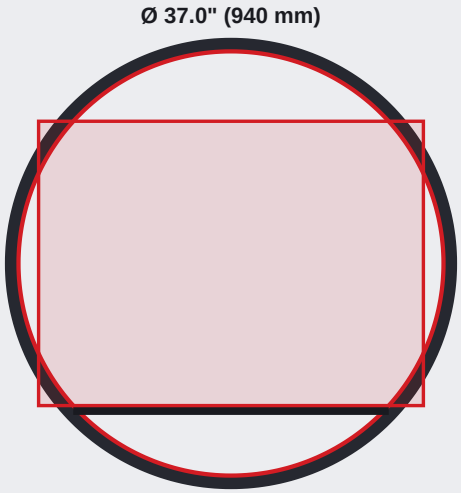

MAX. PRODUCT SECTION (W x H)

MAX. W x H
33.5" x 24.8" (850 x 630 mm)

Max. product section through the ring, drawn to scale. Inches (millimeters).

OZ MACHINE USA
2690 West 3rd Court, Hialeah, FL 33010
+1 833-390-0060 (toll-free) · sales@ozmachineusa.com

USA · CANADA · MEXICO

Product data, descriptions and illustrations may change without prior notice.